Splicing Engineering and Direct Labor are included in the cost of the Remote Terminal Installations, and the Central Office Installations, since field splicing is unnecessary with fiber cable pulls as long as 35,000 feet between splices.

Placing Engineering and Direct Labor are estimated at $2.00 per foot, consisting of $0.50 in engineering per foot, plus $1.50 direct labor per foot. These estimates were provided by a team of Outside Plant Engineering and Construction experts.

The following chart represents the default values used in the model.

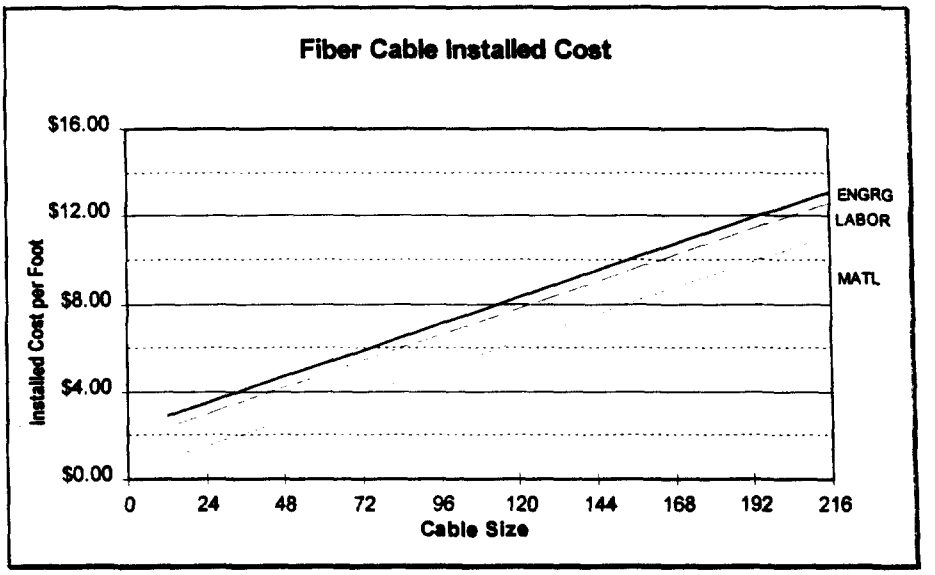

3.5. DLC EQUIPMENT

3.5.1. DLC Site and Power per Remote Terminal

Definition: The investment in site preparation and power for the remote terminal of a Digital Loop Carrier (DLC) system.

Default Values:

Remote Terminal Site and Power	
GR-303 DLC	Low Density DLC
$3,000	$2,500

Support: The incremental per site cost was estimated by a team of outside plant experts with extensive experience in contracting for remote terminal site installations. Low Density DLC requires less space than the higher density GR-303 DLC.

3.5.2. Maximum Line Size per Remote Terminal

Definition: The maximum number of lines supported by the initial line module of a remote terminal.

Default Values:

Maximum Line Increment per Remote Terminal	
GR-303 DLC	Low density DLC
672	96

Support: The standard increment for large fiber optic multiplexers is an OC-3 multiplexer equipped to operate at the OC-1 rate of approximately 50 Mbps. This basic unit provides 28 DS-1s, which can carry 24 DS-0 POTS circuits each. This equates to 672 POTS lines. Although GR-303 allows other concentrations, this is the most common standard used by multiple vendors of Integrated Digital Loop Carrier Systems.

A variety of low density digital loop carrier systems exist in the market today. The HM 4.0 utilizes an integrated configuration, whereby several 96 line Remote Terminal units can home on a standard OC-3 based terminal. Several of these can be used before moving to the larger 672 line system.

3.5.3. Remote Terminal Fill Factor

Definition: The line unit fill factor in a DLC remote terminal, that is, the ratio of lines served by a DLC remote terminal to the number of line units equipped in the remote terminal.

Default Values:

Remote Terminal Fill Factors	
GR-303 DLC	Low Density DLC
.90	.90

Support: The most expensive part of integrated digital loop carrier provisioning is the digital to analog conversion that takes place in the Remote Terminal line card. This expensive card (HM4.0 defaults to $310 per 4 line card) calls for stringent inventory control on the part of the ILEC. Also, fill factors are largely a function of the time frame needed to provide incremental additions. Since line cards are a highly

portable asset, facility relief can be provided by dispatching a technician with line cards, rather than engaging in a several month long copper cable feeder addition. Therefore high fill rates should be the norm for an efficient provider using forward looking technology.

3.5.4. DLC Initial Common Equipment Investment

Definition: The cost of all common equipment and housing in the remote terminal, as well as the fiber optics multiplexer required at the CO end, for the initial line module of the DLC system (assumes integrated digital loop carrier (IDLC)).

Default Values:

Remote Terminal Initial Common Equipment Investment	
GR-303 DLC	Low Density DLC
$66,000	$13,000

Support: The cost of an initial increment of Integrated Digital Loop Electronics was estimated by a team of experienced outside plant experts with extensive experience in contracting for remote terminal site installations. Low Density DLC requires less initial investment.

3.5.5. DLC Channel Unit Investment

Definition: The investment in channel units required in the remote terminal of the DLC system.

Default Values:

GR-303 and low density DLC channel unit investment per unit	
POTS Channel Unit	Coin Channel Unit
$310	$250

Support: The cost of individual POTS Channel Unit Cards was estimated by a team of experienced outside plant experts with extensive experience in contracting for DLC channel units.

3.5.6. DLC Lines per Channel Unit

Definition: The number of lines that can be supported on a single DLC channel unit.

Default Values:

GR-303 and low density DLC Lines per channel unit	
POTS	Coin
4	2

Support: This is the common configuration for all major market leaders in this technology.

3.5.7. Low Density DLC to GR-303 DLC Cutover

Definition: The threshold number of lines served, above which the GR-303 DLC will be used.

Default Value:

Low Density DLC to GR-303 DLC Cutover
384 lines

Support: An analysis of initial costs reveals that 4 Low Density DLC units, at 96 lines each, are more cost effective than a single large IDLC unit with a capacity of 672 lines. Beyond 4 Low Density DLC units, the larger unit is less costly.

3.5.8. Fiber Strands per Remote Terminal

Definition: The number of fibers connected to each DLC remote terminal, including one for upstream transmission, one for downstream transmission, and two for redundancy.

Default Values:

Fibers per Remote Terminal	
GR-303 DLC	Low density DLC
4	4

Support: All standard fiber optic multiplexers manufactured for at least the past 15 years have used this configuration, which includes a 100 percent hot standby backup for the transmit and receive paths. This configuration is common knowledge in the industry.

3.5.9. Optical Patch Panel

Definition: The investment required for each optical patch panel associated with a DLC remote terminal.

Default Values:

Optical Patch Panel	
GR-303 DLC	Low density DLC
$1,000	$1,000

Support: The cost for an installed fiber optic patch panel, including splicing of the fibers to pigtails, was estimated by a team of experienced outside plant experts with extensive experience in contracting for optical patch panels. A fiber optic patch panel contains no electronic, nor moving parts, but allows for the physical cross connection of fiber pigtails.

3.5.10. Copper Feeder Maximum Distance, Feet

Definition: The feeder length above which fiber feeder cable is used in lieu of copper cable.

Default Value:

Copper Feeder Maximum Distance
9,000 feet

Support: The chart below depicts the result of multiple sensitivity runs of the Hatfield Model, wherein the only variable changed is the copper/fiber maximum distance point. Results indicate that Loop Costs per month drop off as the fiber/copper cross-over distance is increased. This reduction in monthly costs is purely a function of the investment carrying charges for the loop. Although there is a significant slope from an all fiber feeder at 0 kft. down to 9,000 feet, the curve is flat beyond 12,000 feet. Although HM 4.0 could reflect somewhat lower monthly costs by moving the copper feeder maximum distance point farther out, most Incumbent Local Exchange Carriers (ILECs) have adopted an engineering policy of placing fiber feeder at distances beyond 9,000 feet. Although significant savings in maintenance cost are likely to occur with the use of fiber and digital loop carrier over copper cable, HM 4.0 does not model those maintenance cost reductions. Therefore a conservative approach has been adopted in using fiber fed integrated digital loop carrier for all feeder cable greater than 9,000 feet in length.

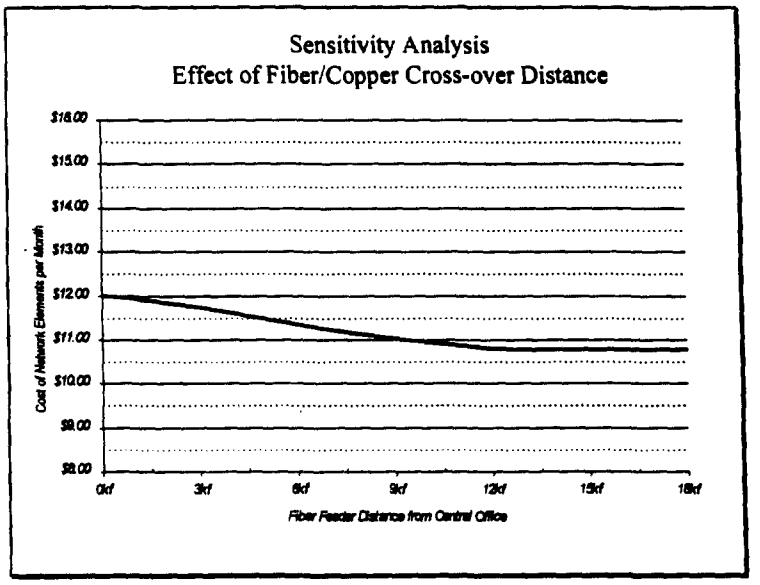

3.5.11. Common Equipment Investment per Additional Line Increment

Definition: The cost of the common equipment required to add a line module in a remote terminal.

Default Values:

Common Equipment Investment per Additional Line Increment	
672	96
$18,500	$11,000

Support: The cost of an additional increment of Integrated Digital Loop Electronics was estimated by a team of experienced outside plant experts with extensive experience in contracting for remote terminal site installations. Low Density DLC requires less initial investment.

3.5.12. Maximum Number of Additional Line Modules per Remote Terminal

Definition: The number of line modules (in increments of 672 or 96 lines) that can be added to a remote terminal.

Default Values:

Max. # Add. Line Modules/RT	
GR-303 DLC	Low density DLC
2	1

Support: A standard OC-3 multiplexed site can provide up to 3 OC-1 systems, each at 672 lines. The Hatfield Model allows for adding 2 additional Common Equipment Investment modules to an initial 672 line system, and 1 additional Common Equipment Investment modules to an initial 96 line system.

3.6. MANHOLE INVESTMENT – COPPER FEEDER

Definition: The installed cost of a prefabricated concrete manhole, including backfill and restoration. All the non-italicized costs in the following table are separately adjustable.

Default Values:

Copper Cable Manhole Investment						
Density Zone	Materials	Frame & Cover	Site Delivery	Total Material	Excavation & Backfill	Total Installed Manhole
0-5	$1,865	$350	$125	*$2,340*	$2,800	*$5,140*
5-100	$1,865	$350	$125	*$2,340*	$2,800	*$5,140*
100-200	$1,865	$350	$125	*$2,340*	$2,800	*$5,140*
200-650	$1,865	$350	$125	*$2,340*	$2,800	*$5,140*
650-850	$1,865	$350	$125	*$2,340*	$3,200	*$5,540*
850-2,550	$1,865	$350	$125	*$2,340*	$3,500	*$5,840*
2,550-5,000	$1,865	$350	$125	*$2,340*	$3,500	*$5,840*
5,000-10,000	$1,865	$350	$125	*$2,340*	$5,000	*$7,340*
10,000+	$1,865	$350	$125	*$2,340*	$5,000	*$7,340*

Support: Costs for various excavation methods were estimated by a team of experienced outside plant experts. Additional information was obtained from printed resources. Still other information was provided by several contractors who routinely perform excavation, conduit, and manhole placement work for telephone companies. Results of those inquiries validated the opinions of outside plant experts and are revealed in the following charts.

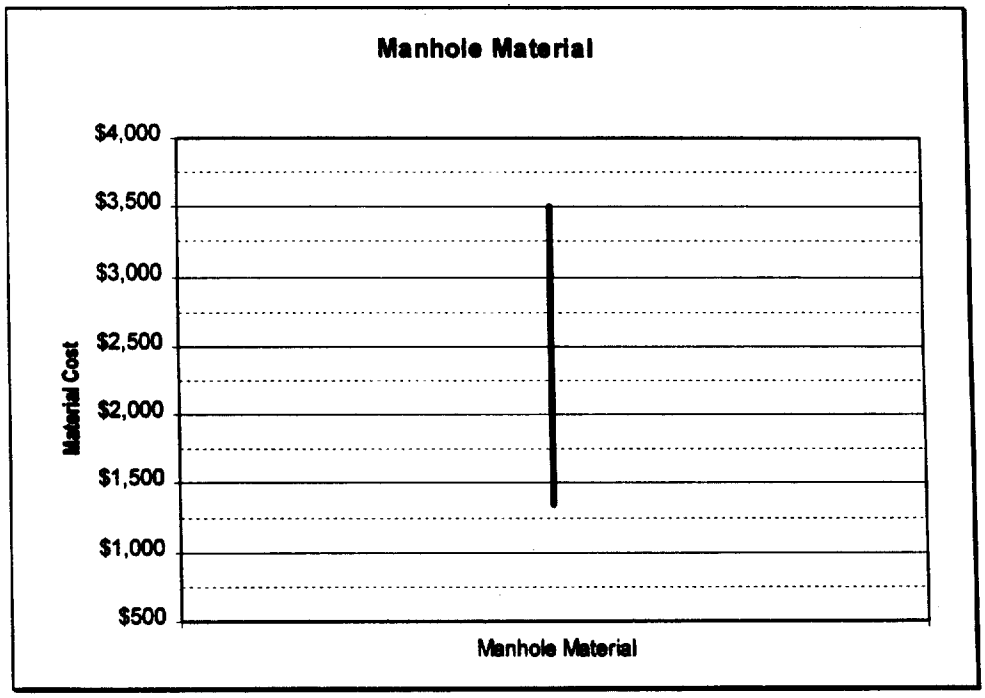

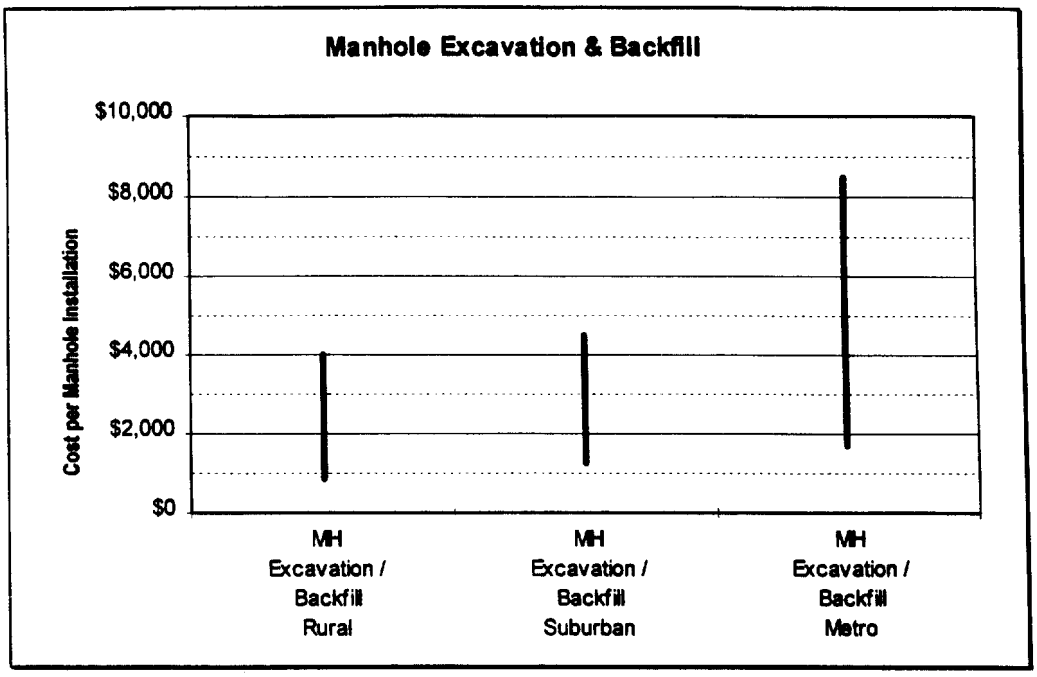
Manhole Excavation & Backfill
$10,000
$8,000
$6,000
$4,000
$2,000
$0
Cost per Manhole Installation
MH Excavation / Backfill Rural
MH Excavation / Backfill Suburban
MH Excavation / Backfill Metro

3.7. PULLBOX INVESTMENT – FIBER FEEDER

Definition: The investment per fiber pullbox in the feeder portion of the network.

Default Values:

Fiber Pullbox Investment		
Density Zone	**Pullbox Materials**	**Pullbox Installation**
0-5	$280	$220
5-100	$280	$220
100-200	$280	$220
200-650	$280	$220
650-850	$280	$220
850-2,550	$280	$220
2,550-5,000	$280	$220
5,000-10,000	$280	$220
10,000+	$280	$220

Support: The information was received from a Vice President of PenCell Corporation at Supercom '96. He stated a price of approximately $280 for one of their larger boxes, without a large corporate purchase discount. Including installation, HM 4.0 uses a default value of $500.

4. SWITCHING AND INTEROFFICE TRANSMISSION PARAMETERS

4.1. END OFFICE SWITCHING

4.1.1. Switch Real-Time Limit, BHCA

Definition: The maximum number of busy hour call attempts (BHCA) a switch can handle. If the model determines that the load on a processor, calculated as the number of busy hour call attempts times the processor feature load multiplier, exceeds the switch real time limit multiplied by the switch maximum processor occupancy, it will add a switch to the wire center.

Default Values:

Switch Real-time limit, BHCA	
Lines Served	**BHCA**
1-1,000	10,000
1,000-10,000	50,000
10,000-40,000	200,000
40,000+	600,000

Support: Industry experience and expertise of Hatfield Associates. These numbers are well within the range of the BHCA limitations NORTEL supplies in its Web site.[23]

Busy Hour Call Attempt Limits from Northern Telecom Internet Site	
Processor Series	**BHCA**
SuperNode Series 10	200,000
SuperNode Series 20	440,000
SuperNode Series 30	660,000
SuperNode Series 40	800,000
SuperNode Series 50 (RISC)	1,200,000
SuperNode Series 60 (RISC)	1,400,000 (burst mode)

4.1.2. Switch Traffic Limit, BHCCS

Definition: The maximum amount of traffic, measured in hundreds of call seconds (CCS), the switch can carry in the busy hour (BH).

If the model determines that the offered traffic load on an end office switching network exceeds the traffic limit, it will add a switch.

[23] http://www.nortel.com

Default Values:

Lines	Busy Hour CCS
1-1,000	30,000
1,000-10,000	150,000
10,000-40,000	600,000
40,000+	1,800,000

Support: Values selected to be consistent with BHCA limit assuming an average holding time of five minutes.

4.1.3. Switch Maximum Equipped Line Size

Definition: The maximum number of lines plus trunk ports that a typical digital switching machine can support.

Default Value:

Switch Maximum Equipped Line Size
80,000

Support: This is a conservative assumption based on industry common knowledge and the Lucent Technologies web site.[24] The site states that the 5ESS-2000 can provide service for "up to as many as 100,000 lines but can be engineered even larger." The Hatfield Model lowers the 100,000 to 80,000, or 80 percent, recognizing that planners will not typically assume the full capacity of the switch can be used.

4.1.4. Switch Port Administrative Fill

Definition: The percent of lines in a switch that are assigned to subscribers compared to the total equipped lines in a switch.

Default Value:

Switch Port Administrative Fill
0.98

Support: Industry experience and expertise of Hatfield Associates in conjunction with subject matter experts.

4.1.5. Switch Maximum Processor Occupancy

Definition: The fraction of total capacity (measured in busy hour call attempts, BHCA) an end office switch is allowed to carry before the model adds another switch.

[24] See Lucent's Web site at http://www.lucent.com/netsys/5ESS/5esswtch.html

Default Value:

Switch Maximum Processor Occupancy
0.90

Support: Bell Communications Research, *LATA Switching Systems Generic Requirements*, Section 17: Traffic Capacity and Environment, TR-TSY-000517, Issue 3, March 1989, figure 17.5-1, p. 17-24.

4.1.6. MDF/Protector Investment per Line

Definition: The Main Distribution Frame investment, including protector, required to terminate one line. According to Lucent's Web site, a main distribution frame is "a framework used to cross-connect outside plant cable pairs to central office switching equipment, but also carrier facility equipment such as Office Repeater Bays and SLC[R] Carrier Central Office Terminals. The MDF is usually used to provide protection and test access to the outside plant cable pairs."

Default Value:

MDF/Protector Investment per Line
$12.00

Support: This price was obtained by Telecom Visions, Inc., a consulting firm that assisted in the preparation of this Input Portfolio,, from a major manufacturer of MDF frames and protectors. A review of this price with information available in various proceedings indicates that this is a competitive investment cost.

4.1.7. Analog Line Circuit Offset for DLC Lines, per Line

Definition: The reduction in per line switch investment resulting from the fact that line cards are not required in both the switch and remote terminal for DLC-served lines.

Default Value:

Analog Line Circuit Offset for DLC Lines
$5.00 per line

Support: This is a Hatfield Associates estimate, which is used in lieu of forward looking alternatives from public sources or ILECs. It is based on consultations with AT&T and MCI subject matter experts.

4.1.8. Switch Installation Multiplier

Definition: The telephone company investment in switch engineering and installation activities, expressed as a multiplier of the switch investment.

Default Value:

Switch Installation Multiplier
1.10

Support: The 10% factor used in the Hatfield model was derived based on the following information: Bell Atlantic ONA filing (FCC Docket 92-91) on February 13, 1992, showed a range of engineering factors for the different Bell Atlantic states between .08 and .108. The SBC ONA filing (FCC Docket 92-91) on May 18, 1992, showed a range of engineering and plant labor factors added together between .0879 and .1288. The 10% incremental-based factor is a fairly conservative estimate, given the ranges filed by two RBOCs using traditional ARMIS-based embedded cost factor development.

4.1.9. End Office Switching Investment Constant Term

Definition: The value of the constant ("B") appearing in the function that calculates the per line switching investment as a function of switch line size, expressed separately for BOCs and large independents (ICOs), on the one hand, and for small ICOs, on the other hand. The function is cost per line = A ln X + B, where X is the number of lines.

Default Values:

End Office Switching Investment Constant Term	
BOC & Large ICO	Small ICO
$242.73	$416.11

Support: The switching cost surveys were developed using typical per-line prices paid by BOCs, GTE and other independents as reported in the Northern Business Information (NBI) publication, "U.S., Central Office Equipment Market: 1995 Database," compared to switch size and data from the ARMIS 43-07 report.[25] See, Hatfield Model Release 4.0 Model Description, p. 47-50.

4.1.10. End Office Switching Investment Slope Term

Definition: The constant multiplying the log function ("A" in the function shown in parameter 4.1.9.) in the EO switching investment function.

Default Value:

EO Switching Investment Slope Term
-14.922

Support: The switching cost surveys were developed using typical per-line prices paid by BOCs, GTE and other independents as reported in the Northern Business Information (NBI) publication, "U.S., Central Office Equipment Market: 1995 Database," compared to switch size and data from the ARMIS 43-07 report.[26] See, Hatfield Model Release 4.0 Model Description, p. 47-50.

4.1.11. Processor Feature Loading Multiplier

Definition: The amount by which the load on a processor exceeds the load associated with ordinary telephone calls, due to the presence of vertical features, Centrex, etc., expressed as a multiplier of nominal load.

---

[25] Northern Business Information study: U.S. Central Office Equipment Market – 1995, McGraw-Hill, New York, 1996.

Default Value: 1.20 for business line percentage up to the variable business penetration rate, increasing linearly above that rate to a final value of 2.00 for 100% business lines.

Support: This is a Hatfield Associates estimate of the impact of switch features typically utilized by businesses on switch processor load. The assumption is that business lines typically invoke more features and services. Therefore, business lines affect processor real time loading more than residential lines. It is based on consultations with AT&T and MCI subject matter experts.

4.1.12. Business Penetration Ratio

Definition: The ratio of business lines to total switched lines at which the processor feature loading multiplier is assumed to reach the "heavy business" value of 2.

Default Value:

Business Penetration Ratio
0.30

Support: This is a Hatfield Associates estimate of the point at which the number of business lines will cause the 20 percent processor load addition. It is based on consultations with AT&T and MCI subject matter experts.

4.2. WIRE CENTER

4.2.1. Lot Size, Multiplier of Switch Room Size

Definition: The multiplier of switch room size to arrive at total lot size to accommodate building and parking requirements.

Default Value:

Lot Size, Multiplier of Switch Room Size
2.0

Support: This is a Hatfield Associates estimate.

4.2.2. Tandem/EO Wire Center Common Factor

Definition: The percentage of tandem switches that are also end office switches. This accounts for the fact that tandems and end offices are often located together, and is employed to avoid double counting of switch common equipment and wire center investment in these instances.

Default Value:

Tandem/EO Wire Center Common Factor
0.4

Support: This is a conservatively low estimate of the number of shared-use switches based on Local Exchange Routing Guide (LERG) data.

4.2.3. Power Investment

Definition: The wire center investment required for rectifiers, battery strings, back-up generators and various distributing frames, as a function of switch line size.

Default Values:

Lines	Investment Required
0	$5,000
1000	$10,000
5000	$20,000
25,000	$50,000
50,000	$250,000

Support: This is a Hatfield Associates Estimate.

4.2.4. Switch Room Size

Definition: The area in square feet required to house a switch and its related equipment.

Default Values:

Switch Room Size	
Lines	Sq. Feet of Floor Space Required
0	500
1,000	1,000
5,000	2,000
25,000	5,000
50,000	10,000

Support: Industry experience and expertise of Hatfield Associates along with information taken from manufacturer product literature (e.g., Nortel DMS-500 Planner and 5ESS Switch Information Guide). Furthermore, these values are supported by discussions over the years with personnel from LECs and competitive access providers who are familiar with the size of switch rooms through installing switches and/or acquiring space for network switches.

4.2.5. Construction Costs, per Square Foot

Definition: The costs of construction of a wire center building. Although cost per square foot generally decreases as building size increases, the construction cost per square foot is assumed to increase with the number of lines served to account for higher prices typically associated with greater population densities where larger switches tend to be located.

Default Values:

Construction Costs per sq. ft.	
Lines	Cost/sq. ft.
0	$75
1,000	$85
5,000	$100
25,000	$125
50,000	$150

Support: This is a Hatfield Associates estimate.

4.2.6. Land Price, per Square Foot

Definition: The land price associated with a wire center. Land cost per square foot increases with the number of lines served to account for higher prices typically associated with greater population densities where larger switches are located.

Default Values:

Lines	Price/sq. ft.
0	$5.00
1,000	$7.50
5,000	$10.00
25,000	$15.00
50,000	$20.00

Support: This is a Hatfield Associates estimate.

4.3. TRAFFIC PARAMETERS

4.3.1. Local Call Attempts

Definition : The number of yearly local call attempts, as reported to the FCC.

Default Value: Taken from ARMIS reports for the LEC being studied.

Support: ARMIS report 43-08. For non-Tier I LECs, the default value is the average per line local call attempt value for all ICOs reporting to ARMIS.

4.3.2. Call Completion Fraction

Definition: The percentage of call attempts that result in a completed call. By this definition, calls that result in a busy signal, no answer, or network blockage are all considered incomplete.

Default Value:

Call Completion Fraction
0.7

Support: Bell Communications Research, *LATA Switching Systems Generic Requirements*, Section 17: Traffic Capacity and Environment, TR-TSY-000517, Issue 3, March 1989. This number is a composite of the results shown in table 17.6-B.

4.3.3. IntraLATA Calls Completed

Definition : The number of yearly intraLATA completed call attempts, as reported to the FCC.

Default Value: Taken from ARMIS reports for the LEC being studied.

Support: ARMIS report 43-08. For non-Tier I LECs, the default value is the average per line IntraLATA calls completed value for all ICOs reporting to ARMIS.

4.3.4. InterLATA Intrastate Calls Completed

Definition : The number of yearly interLATA intrastate completed call attempts, as reported to the FCC.

Default Value: Taken from ARMIS reports for the LEC being studied.

Support: ARMIS report 43-08. For non-Tier I LECs, the default value is the average per line interLATA intrastate calls completed value for all ICOs reporting to ARMIS.

4.3.5. InterLATA Interstate Calls Completed

Definition : The number of yearly interLATA interstate completed call attempts, as reported to the FCC.

Default Value: Taken from ARMIS reports for the LEC being studied.

Support: ARMIS report 43-08. For non-Tier I LECs, the default value is the average per line interLATA interstate calls completed value for all ICOs reporting to ARMIS.

4.3.6. Local DEMs, Thousands

Definition : The number of yearly local Dial Equipment Minutes (DEMs), as reported to the FCC.

Default Value: Taken from FCC reports for the LEC being studied.

Support: See FCC Monitoring Report, Docket No. 87-339, May 1995, Table 4.15.

4.3.7. Intrastate DEMs, Thousands

Definition : The number of yearly intrastate DEMs, as reported to the FCC.

Default Value: Taken from FCC reports for the LEC being studied.

Support: See FCC Monitoring Report, Docket No. 87-339, May 1995, Table 4.16.

4.3.8. Interstate DEMs, Thousands

Definition : The number of yearly interstate DEMs, as reported to the FCC.

Default Value: Taken from FCC reports for the LEC being studied.

Support: See FCC Monitoring Report, Docket No. 87-339, May 1995, Table 4.17.

4.3.9. Local Business/Residential DEMs Ratio

Definition: The ratio of local Business DEMs per line to local Residential DEMs per line

Default Value:

Local Bus / Res DEMs Ratio
1.1

Support: This is a Hatfield Associates estimate, based on consultations with AT&T and MCI subject matter experts.

4.3.10. Intrastate Business/Residential DEMs

Definition: The ratio of intrastate Business DEMs per line to intrastate Residential DEMs per line

Default Value:

Intrastate Bus / Res DEMs Ratio
2

Support: This is a Hatfield Associates estimate, based on consultations with AT&T and MCI subject matter experts.

4.3.11. Interstate Business/Residential DEMs

Definition: The ratio of interstate Business DEMs per line to interstate Residential DEMs per line

Default Value:

Interstate Bus / Res DEMs Ratio
3

Support: This is a Hatfield Associates estimate, based on consultations with AT&T and MCI subject matter experts.

4.3.12. Busy Hour Fraction of Daily Usage

Definition: The percentage of daily usage that occurs during the busy hour.

Default Value:

Busy Hour Fraction of Daily Usage
0.10

Support: AT&T Capacity Cost Study.[27]

4.3.13. Annual to Daily Usage Reduction Factor

Definition: The effective number of business days in a year, used to concentrate annual usage into a fewer number of days as a step in determining busy hour usage.

Default Value:

Annual to Daily Usage Reduction Factor
270

Support: The AT&T Capacity Cost Study uses an annual to daily usage reduction factor of 264 days.[28]

---

[27] Blake, V.A., Flynn, P.V., Jennings, F.B., AT&T Bell Laboratories, "A Study of AT&T's Competitors' Capacity to Absorb Rapid Demand Growth," June 20, 1990, p.10. Filed in CC Docket No. 90-132.

[28] Ibid.

4.3.14. Holding Time Multipliers, Residential/Business

Definition: The potential modification to the average call "holding time" (i.e., duration) to reflect Internet use or other causes, expressed as a multiplier of the holding time associated with ordinary residential or business telephone calls.

Default Values:

Holding time multipliers	
Residential	Business
1.0	1.0

Support: The purpose of this parameter is to allow users to study the impact of increasing the offered load on the network. The default value of 1 means the load is that estimated from DEMs.

4.3.15. Call Attempts, Busy Hour (BHCA), Residential/Business

Definition: The number of call attempts originated per residential and business subscriber during the busy hour.

Default Values:

Busy Hour Call Attempts	
Residential	Business
1.3	3.5

Support: Bell Communications Research, *LATA Switching Systems Generic Requirements*, Section 17: Traffic Capacity and Environment, TR-TSY-000517, Issue 3, March 1989. This number is a composite of the results shown in table 17.6 C-G.

4.4. INTEROFFICE INVESTMENT

4.4.1. Transmission Terminal Investment

Definition: The investment in 1) the fully-equipped add-drop multiplexer (ADM) that extracts/inserts signals into OC-48 fiber rings, and are needed in each wire center to connect the wire center to the interoffice fiber ring; and 2) the fully-equipped OC-3/DS-1 multiplexers required to interface to the OC-48 ADM and to provide point to point circuits between tandem switches and end offices not connected directly to a fiber ring. The "Investment per 7 DS-1" figure is the amount by which the investment in OC-3s is reduced for each unit of 7 DS-1s below full capacity of the OC-3. See the figure in Appendix A.

Default Values:

Transmission Terminal Investment			
OC-48 ADM, Installed		OC-3/DS-1 Terminal Multiplexer, Installed	Investment per 7 DS-1s
48 DS-3s	12 DS-3s	84 DS-1s	
$50,000	$40,000	$26,000	$500

Support: Industry experience and expertise of Hatfield Associates, supplemented by consultations with telecommunications equipment suppliers.

4.4.2. Number of Fibers

Definition: The assumed fiber cross-section, or number of fibers in a cable, in the interoffice fiber ring and point to point network.

Default Value:

Number of Fibers
24

Support: The default value is consistent with common practices within the telecommunications industry and reflects the engineering judgment of Hatfield Model developers.

4.4.3. Pigtails

Definition: The cost of the short fiber connectors that attach the interoffice ring fibers to the wire center transmission equipment via a patch panel.

Default Value:

Pigtails
$60 each

Support: A public source estimates the cost of pigtails at $75.00 per fiber. See, Reed, David P., Residential Fiber Optic Networks and Engineering and Economic Analysis, Artech House, Inc., 1992, p.93. The lower amount reflects Hatfield Associates' estimate of price trends since that figure was published.

4.4.4 Optical Distribution Panel

Definition: The cost of the physical fiber patch panel used to connect 24 fibers to the transmission equipment.

Default Value:

Optical Distribution Panel
$1,000

Support: The cost for an installed fiber optic patch panel, including splicing of the fibers to pigtails, was estimated by a team of experienced outside plant experts who have contracted for such installations. A fiber optic patch panel contains no electronic, nor moving parts, but allows for the physical cross connection of fiber pigtails.

4.4.5. EF&I, per Hour

Definition: The per-hour cost for the "engineered, furnished, and installed" activities for equipment in each wire center associated with the interoffice fiber ring, such as the "pigtails" and patch panels to which the transmission equipment is connected.

Default Value:

EF&I
$55 per hour

Support: This is a fully loaded labor rate used for the most sophisticated technicians. It includes basic wages and benefits, Social Security, Relief & Pensions, management supervision, overtime, exempt material and motor vehicle loadings. This value was estimated by a team of experienced outside plant experts.

4.4.6. EF&I, Units

Definition: The number of hours required to install the equipment associated with the interoffice transmission system (see EF&I, per hour, above) in a wire center.

Default Value:

EF&I, units
32 hours

Support: This amount of labor was estimated by a team of experienced engineering experts. It includes the labor hours to install and test the transport equipment involved in interoffice facilities.

4.4.7. Regenerator Investment, Installed

Definition: The installed cost of an OC-48 optical regenerator.

Default Value:

Regenerator Investment, Installed
$15,000

Support: This approximation was obtained from a representative of a major fiber optic multiplexer manufacturer at Supercom '96, in June 1996 in Dallas, Texas.

4.4.8. Regenerator Spacing, Miles

Definition: The distance between digital signal regenerators in the interoffice fiber optics transmission system.

Default Value:

Regenerator Spacing
40 miles

Support: Based on field experience of maximum distance before fiber regeneration is necessary. This number is conservatively low compared to Fujitsu product literature, which indicates a maximum regenerator spacing of 110km, or approximately 69 miles[29] (with post- and pre-amp).

4.4.9. Channel Bank Investment, per 24 Lines

Definition: The investment in voice grade to DS-1 multiplexers in wire centers required for some special access circuits.

Default Value:

Channel Bank Investment, per 24 lines
$5,000

Support: Industry experience and expertise of Hatfield Associates, supplemented by consultations with telecommunications equipment suppliers.

4.4.10. Fraction of SA Lines Requiring Multiplexing

Definition: The percentage of special access circuits that require voice grade to DS-1 multiplexing in the wire center in order to be carried on the interoffice transmission system. This parameter is for use in conjunction with a study of the cost of special access circuits.

Default Value:

Fraction of SA Lines Requiring Multiplexing
0.0

[29] Futjitsu Network Communications, Inc. product sheet for Flash™-192 multiplexer, "Typical Optical Span Lengths SMF Fiber {Single Mode Fiber} 110 km (with post- and pre-amp).

Support: This value is based on Hatfield Associates engineering judgment. The default value of zero is appropriate for the existing set of UNEs, which do not include a special access UNE.

4.4.11. Digital Cross Connect System, Installed, per DS-3

Definition: The investment required for a digital cross connect system that interfaces DS-1 signals between switches and OC-3 multiplexers, expressed on a per DS-3 (672 DS-0) basis.

Default Value:

Digital Cross Connect System, Installed, per DS-3
$30,000

Support: Industry experience and expertise of Hatfield Associates, supplemented by consultations with telecommunications equipment suppliers.

4.4.12. Transmission Terminal Fill (DS-0 level)

Definition: The fraction of maximum DS-0 circuit capacity that can actually be utilized in ADMs, DS-1 to OC-3 multiplexers, and channel banks.

Default Value:

Transmission Terminal Fill (DS-0 level)
0.90

Support: Based on outside plant subject matter expert judgment.

4.4.13. Interoffice Fiber Cable Investment per Foot, Installed

Definition: The installed cost per foot of interoffice fiber cable, assuming a 24-fiber cable.

Default Value:

Interoffice Fiber Cable Investment, Installed, per foot
$3.50

Support: ***{NOTE: The discussion in Section 3.4.2. [Fiber Feeder] is reproduced here for ease of use.}***

Outside plant planning engineers commonly assume that the cost of cable material can be represented as an a + bx straight line graph. In fact, Bellcore Planning tools, EFRAP I, EFRAP II, and LEIS:PLAN have the engineer develop such an a + bx equation to represent the cost of cable. As technology, manufacturing methods, and competition have advanced, the price of cable has been reduced. While in the past, the cost of fiber cable was typically ($.50 + $.10 per fiber) per foot, current costs are typically ($.30 + $.05 per fiber) per foot.

Splicing Engineering and Direct Labor are included in the cost of the Remote Terminal Installations, and the Central Office Installations, since field splicing is unnecessary with fiber cable pulls as long as 35,000 feet between splices.