



FEDERAL COMMUNICATIONS COMMISSION
FM BROADCAST STATION CONSTRUCTION PERMIT

Official Mailing Address:

FAMILY STATIONS, INC.
290 HEGENBERGER RD.
OAKLAND, CA 94621

Authorizing Official:

Deborah Price
Deborah Price
Supr Applications Examiner, FM Branch
Audio Services Division
Mass Media Bureau

Grant Date: June 08, 1987


Call sign: KEHC

This permit expires 3:00 am.
local time: December 08, 1988

Permit File No.: BPED-840731IE

This authorization re-issued to reflect a call sign change from 840731IE to KEHC effective 9/11/87.

Subject to the provisions of the Communications Act of 1934, as amended, subsequent acts and treaties, and all regulations heretofore or hereafter made by this Commission, and further subject to the conditions set forth in this permit, the permittee is hereby authorized to construct the radio transmitting apparatus herein described. Installation and adjustment of equipment not specifically set forth herein shall be in accordance with representations contained in the permittee's application for construction permit except for such modifications as are specifically permitted without application by the

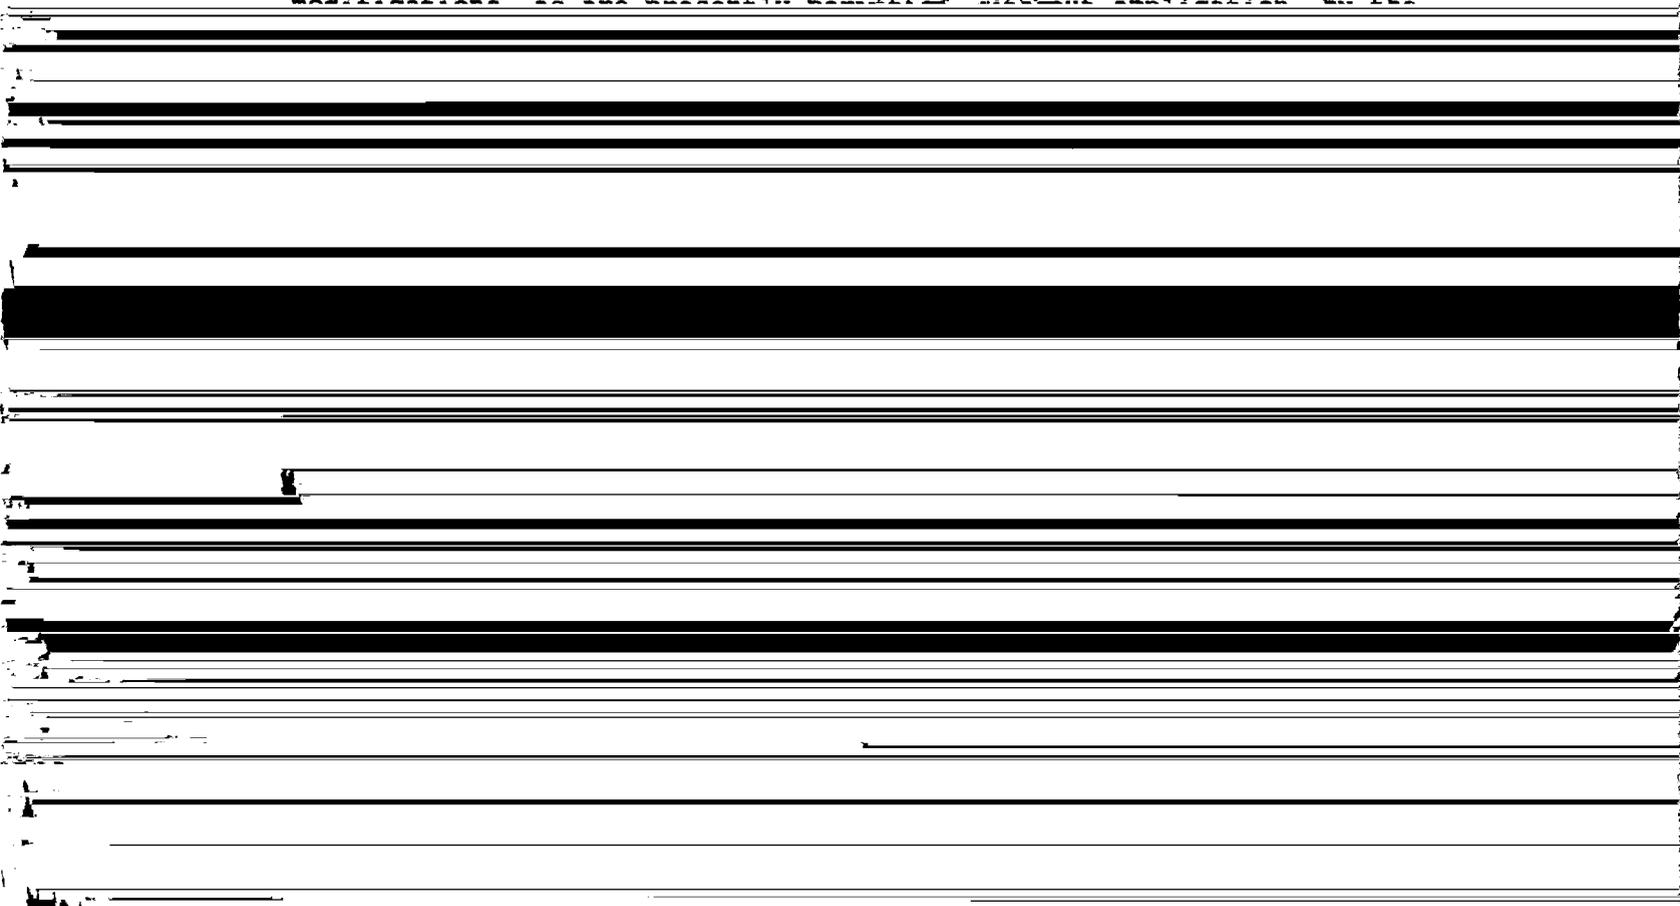

Call sign: KEHC

Permit No.: BPED-840731IE

Channel: 213

Class: A

Hours of Operation: Unlimited

Transmitter location (address or description):

PARKWAY INDUSTRIAL PARK, BETWEEN ROUTES 80 AND 20,

Call sign: KEHC

Permit No.: BPED-840731IE

Obstruction marking and lighting specifications for antenna structure:

It is to be expressly understood that the issuance of these specifications is in no way to be considered as precluding additional or modified marking

Paragraph 21.0, FCC Form 715 (March 1978):

All lighting shall burn continuously or shall be controlled by a light sensitive device adjusted so that the lights will be turned on at a north sky light intensity level of about 35 foot candles and turned off at a north sky light intensity level of about 58 foot candles.

Paragraph 22.0, FCC Form 715 (March 1978):

During construction of an antenna structure, for which obstruction lighting is required, at least two 116- or 125-watt lamps (A21/TS) enclosed in aviation red obstruction light globes, shall be installed at the uppermost point of the structure. In addition, as the height of the structure exceeds each level at which permanent obstruction lights will be required, two similar lights shall be displayed nightly from sunset to sunrise until the permanent obstruction lights have been installed and placed in operation, and shall be positioned so as to insure unobstructed visibility of at least one of the lights at any normal angle of approach. In lieu of the above temporary warning lights, the permanent obstruction lighting fixtures may be installed and operated at each required level as each such level is exceeded in