

APPENDIX

CATALOG OF POTENTIAL EXPENSES AND ESTIMATED COSTS

Catalog of Potential Expenses and Estimated Costs

Table of Contents

I. ABOUT THIS CATALOG	2 -
II. BROADCAST COSTS	3 -
A. TRANSMITTERS AND IN-BUILDING EXPENSES	3 -
1. Retune Existing Transmitter.....	3 -
2. New Transmitters.....	4 -
3. Other Transmitter Expenses.....	6 -
B. ANTENNAS.....	7 -
C. TRANSMISSION LINES	9 -
D. TOWER EQUIPMENT AND RIGGING	10 -
E. INTERIM FACILITIES	11 -
F. SPECIAL CASES.....	12 -
1. Channel 14	12 -
2. Distributed Transmission Services (DTS).....	12 -
3. AM Pattern Disturbance	12 -
G. MISCELLANEOUS EXPENSES	13 -
1. DTV Medical Facility Notification	13 -
2. Other	13 -
H. PROFESSIONAL SERVICES	14 -
III. MVPD COSTS	16 -
IV. FIGURES	17 -

Catalog of Potential Expenses and Estimated Costs

I. ABOUT THIS CATALOG

This catalog of expenses (Catalog) contains descriptions of the expenses that broadcasters and MVPDs are most likely to incur as a result of broadcaster repacking. While we believe the Catalog is relatively comprehensive, it does not cover every expense, for every situation, nor is it an exhaustive list of all expenses that may potentially qualify for reimbursement.

Widely, Inc. (Widely) developed the original Catalog in 2013 for the Federal Communications Commission (FCC) as part of the Widely Report, which was published for comment in 2014 (DA/FCC: DA-14-389). As part of the ongoing Broadcast Television Incentive Auction, the FCC engaged Widely to update the Catalog to reflect the current pricing for the equipment and services that repacked broadcasters may need to purchase to facilitate the moves to their new channel assignments, and the current pricing for equipment and services that MVPDs may need to purchase to continue to carry broadcasters. Widely first developed the information contained in this Catalog based on its research and interviews with industry stakeholders, conducted in 2013, and later updated in August of 2016, pursuant to its contract with the FCC. The categories and costs contained in the Catalog are intended to serve as a reference guide, and are not intended to identify the particular expenses for which individual broadcasters or MVPDs would be eligible for reimbursement.

Individual broadcasters and/or MVPDs will incur only some of the expenses listed in the Catalog, depending upon the broadcaster's or MVPD's existing equipment and the particular transition changes that the entity must make. Some of the expenses will apply only in limited situations, such as, for example, broadcasters operating on a shared antenna or those that require additional power to support an interim transmitter.

Supply and demand constraints may have an impact on future costs.

Catalog of Potential Expenses and Estimated Costs

II. BROADCAST COSTS

A. TRANSMITTERS AND IN-BUILDING EXPENSES

1. Retuning Existing Transmitters

Depending on a broadcaster's new channel assignment, it may be able to retune its existing transmitter to transmit on the new channel rather than replace it. Transmitters can be retuned only to channels within the same band (*e.g.*, UHF transmitters can only be retuned to channels within the UHF band). *See* *Widely Report* pp. 17-18 regarding banding issues. Whether retuning is feasible depends on a number of factors, including the type of transmitter, the range of channels (sub-band) for which it and its component parts are designed, and whether replacement parts and manufacturer support are available. In some cases, replacement may be the preferred option if the cost of retuning exceeds the cost of a new transmitter. The transmitter output mask filter is channel-specific and must be replaced to accommodate any channel change.

Our discussions indicate that there are a number of potential issues with Inductive Output Tube (IOT) transmitter retuning, including:

- IOT tubes that have been in service for an extended period may not “come back up” on the new channel once they have been powered down necessitating replacements that cannot be predicted before starting the retuning process.
- The lead time for delivery of new IOT tubes can be as long as 6 to 9 months.
- The skill set to retune IOT transmitters is no longer broadly available. This will cause resource constraints as stations consider retuning their existing IOT transmitters.
- Manufacturer support and certain parts necessary for retuning existing IOT transmitters may no longer be available.

	Range of Estimated Costs (in dollars)
UHF – Inductive Output Tube (IOT) Transmitter (Price would include banded drivers, RF system, and labor. The price does not include the cost of IOT tubes, finger stock and/or tube trolleys. Cost varies by manufacturer.)	
One IOT system (30kW)	118,000 - 231,500
Two IOT systems (60 kW)	148,500 - 347,000
Three IOT systems (90 kW)	164,000 - 463,000
IOT replacement tube with accessories (<i>price per tube</i>)	77,000 - 124,000

Catalog of Potential Expenses and Estimated Costs

Solid State Transmitter Prices based on specific channel move and would include field engineering and parts to retune the RF system but would not include the cost of a new mask filter, which is a separate line item below. Costs vary widely by manufacturer and power level. Retuning solid state transmitters is usually only feasible if the banding issues are minor. Stations that use solid state transmitters that have major banding issues will likely need a replacement solid state transmitter.	
UHF and VHF – minor banding issues	10,200 - 102,400
New Mask Filter – A new mask filter is required for any channel change	
1.5 kW mask filter	2,950
3 kW mask filter	4,045
7 kW mask filter	6,040
10 kW mask filter	8,090
30 kW mask filter	31,750
60 kW mask filter	87,000
90 kW mask filter	97,300
New Exciter – In a few cases, a station may need to purchase a new exciter if the existing exciter cannot be retuned.	
Single frequency agile exciter	20,500
Dual exciter system with change over	46,100

2. New Transmitters

If retuning is not possible or if the cost of retuning exceeds the cost of replacement, a new transmitter may be required. The price of a new transmitter includes installation, mask filter, and proof of performance testing.

	Range of Estimated Costs (in dollars)
UHF – IOT Transmitter	
One IOT system (30 kW)	486,000 - 562,000
Two IOT systems (60 kW)	855,000 - 929,000
Three IOT systems (90 kW)	1,306,000 - 1,377,000
UHF – Air Cooled Solid State Transmitter	
1 – 2.5 kW	41,000 - 123,000

Catalog of Potential Expenses and Estimated Costs

4 - 6 kW	161,000 - 230,500
10 – 12 kW	251,000 - 327,500
15 kW	402,000
20 kW	568,000
UHF – Liquid Cooled Solid State Transmitter	
4.9 – 6.5 kW	230,500 - 266,000
8.2 - 13 kW	276,500 - 481,500
14.2 - 20 kW	507,000 - 666,000
21 - 31 kW	691,000 - 922,000
35 - 50 kW	1,024,000 - 1,434,000
52 - 61 kW	1,587,000 - 1,741,000
68.5 - 75 kW	1,792,000 - 1,946,000
86.8 – 106 kW	2,150,000 - 2,560,000
High VHF – Air Cooled Solid State Transmitter	
1.1 – 4.4 kW	48,000 - 148,500
6.5 – 12.5 kW	179,000 - 322,500
16.6 – 20.7 kW	409,500 - 512,000
24.5 kW	666,000
High VHF – Liquid Cooled Solid State Transmitter	
3.3 – 6.5 kW	138,000 - 242,500
8.5 – 12.5 kW	298,000 - 435,500
16.6 – 20.7 kW	553,000 - 691,000
24.5 – 31.6 kW	899,000 - 973,000
48.0 kW	1,382,000
62.0 kW	1,741,000

Catalog of Potential Expenses and Estimated Costs

3. Other Transmitter Expenses

In limited situations, these expenses may apply in addition to those listed in Sections II.A.1 or II.A.2, above.

	Range of Estimated Costs (in dollars)
Combiners for Shared (Broadband Panel) Antenna (UHF/VHF)	
New combiner, cost per channel (without antenna)	51,200 - 81,900
Adding a module to existing combiner (without antenna)	51,200 - 81,900
Combiner output splitting/switching for dual feed lines, if applicable	123,000
Electrical Service – A station installing replacement transmitter equipment may have to increase the power supply to the transmitter or perform other electrical work (<i>prices include labor and installation</i>).	
Service entrance 3 phase/800 amp/208 volt	14,050
Switchgear – industrial 800 amp	37,150
Transformer 3 phase/480v – 150 KVA	24,900
Transformer 3 phase/480v – 300 KVA	35,850
Transformer 3 phase/480v – 500 KVA	47,100
2” Rigid Conduit and Wiring (Cost per foot)	26
3” Rigid Conduit and Wiring (Cost per foot)	50
4” Rigid Conduit and Wiring (Cost per foot)	98
HVAC Service – Cooling only – A station installing replacement transmitter equipment may need additional cooling capability (<i>prices include labor and installation</i>).	
5 Ton system	19,700
10 Ton system	37,900
15 Ton system	54,300
25 Ton system	89,100
50 Ton system	168,000
HVAC Service – Heating and Cooling – A station installing replacement transmitter equipment may need additional air-handling capacity that includes both heating and cooling capability (<i>prices include labor and installation</i>).	
10 Ton system	58,900
15 Ton system	86,000

Catalog of Potential Expenses and Estimated Costs

20 Ton system	112,500
30 Ton system	162,000
50 Ton system	259,000
Transmitter Building Addition – In limited situations, expansion of the transmitter building may be required to accommodate new equipment.	
Approx. 600-1500 square foot addition (costs vary with location, site access, and construction type)	Variable

B. ANTENNAS

Most stations moving to a new channel will require new antennas. The price of an antenna does not include installation or removal of existing antennas (for those expenses, *see* Section II.D, Tower Equipment and Rigging). In some cases, new transmission lines will also be required (for those expenses, *see* Section II.C, Transmission Lines).

	Range of Estimated Costs (in dollars)
UHF – High Power Top Mount (200-1000 kW)	
One station antenna, horizontally polarized	153,500 - 240,500
One station antenna, elliptically or circularly polarized	184,500 - 281,500
Two station broadband panel antenna, horizontally polarized	246,000 - 532,000
Two station broadband panel antenna, elliptically or circularly polarized	333,000 - 748,000
Four station broadband panel antenna, horizontally polarized	292,000 - 758,000
Four station broadband panel antenna, elliptically or circularly polarized	541,000 - 1,061,000
UHF – Lower Power Side Mount	
One station –200-500 kW, horizontally polarized	128,000 - 184,500
One station –200-500 kW, elliptically or circularly polarized	153,500 - 221,000
One station antenna – medium power (50-200 kW), horizontally polarized	51,200 - 87,000
One station antenna – medium power (50-200 kW), elliptically or circularly polarized	57,300 - 100,400
Class A single station antenna – basic	12,300 - 25,600
Class A broadband panel (cost per panel)	845 - 1,230
Class A broadband panel (multiple channel array - example 4 panel complete array)	6,140 - 8,190
UHF – Broadband Slot, Side Mount	
8 bay, 5 kW input, directional, horizontally polarized	10,240
8 bay, 20 kW input, directional, horizontally polarized	43,000 - 58,400
8 bay, 20 kW input, directional, elliptically or circularly polarized	84,000

Catalog of Potential Expenses and Estimated Costs

16 bay, 8 - 10 kW input, directional, horizontally polarized	20,500 - 36,850
16 bay, 16 kW input, directional, horizontally polarized	44,050
16 bay, 40 kW input, directional, horizontally polarized	65,500 - 126,000
16 bay, 40 kW input, directional, elliptically or circularly polarized	161,000
24 bay, 15 kW input, directional, horizontally polarized	30,700
24 bay, 60 kW input, directional, horizontally polarized	148,500 - 185,500
24 bay, 60 kW input, directional, elliptically or circularly polarized	240,500
32 bay, 16 kW input, directional, horizontally polarized	72,700
32 bay, 32 kW input, directional, horizontally polarized	87,000
32 bay, 60 - 65 kW input, directional, horizontally polarized	123,000 - 205,000
UHF – Broadband Panel, Side Mount Aux/Interim	
10 kW input, low gain, horizontally polarized	30,700 - 46,100
45 kW input, low gain, horizontally polarized	102,500 - 138,000
High-VHF	
One station antenna – top mount, horizontally polarized	256,000 - 333,000
One station antenna – top mount, elliptically or circularly polarized	286,500 - 383,000
One station antenna – side mount, horizontally polarized	63,500 - 184,500
One station antenna – side mount, elliptically or circularly polarized	69,500 - 212,000
Shared broadband panel antenna – 5 station, elliptically or circularly polarized	717,000 - 911,000
High-VHF, Low Power	
Class A basic slot antenna – side mount, horizontally polarized	19,450 - 23,550
Class A basic slot antenna – side mount, elliptically or circularly polarized	23,550 - 27,150
Class A broadband panel (cost per panel) , horizontally polarized	4,095 - 5,120
Class A broadband panel (multiple channel array - example 4 panel complete array), horizontally polarized	16,900 - 20,300
Other	
Sweep test of transmission line and antenna	4,610 - 6,550
Elbow complex, single channel, at antenna input, per 3-1/8" feedline (if needed)	7,580
Elbow complex, broadband, at antenna input, per 3-1/8" feedline (if needed)	9,090
Elbow complex, single channel, at antenna input, per 4-1/16" feedline (if needed)	9,320
Elbow complex, broadband, at antenna input, per 4-1/16" feedline (if needed)	10,650

Catalog of Potential Expenses and Estimated Costs

Elbow complex, single channel, at antenna input, per 6-1/8" feedline (if needed)	12,000
Elbow complex, broadband, at antenna input, per 6-1/8" feedline (if needed)	13,300
Elbow complex, single channel, at antenna input, per 7-3/16" feedline (if needed)	13,500
Elbow complex, broadband, at antenna input, per 7-3/16" feedline (if needed)	16,400
Elbow complex, single channel, at antenna input, per 8-3/16" feedline (if needed)	14,850
Elbow complex, broadband, at antenna input, per 8-3/16" feedline (if needed)	18,450
Side mount brackets for high power antennas (if not included in antenna base cost)	7,700 - 22,550
Pattern scatter analysis for side mount high/med power antennas (if not included in antenna base cost)	3,890 - 5,120
Note: For stacked antennas, the cost of the bottom antenna will likely double due to the increased cost of structural components, such as heavier steel and longer structures	

6224

C. TRANSMISSION LINES

In some situations, transmission lines can be reused in the event of a channel change (*e.g.*, if the move is to a non-prohibited channel or if the transmission line is broadband capable). *See* Fig. 1 below. New transmission lines, if needed for purchase, are generally priced per foot, based on a length of 1,000 feet. The price generally includes elbows and hangers.

	Range of Estimated Costs (in dollars)
Flexible Transmission Line	
Line Diameter:	
7/8" foam dielectric	10
1 5/8" foam dielectric	24
7/8" air dielectric	17
1 5/8" air dielectric	32
3" air dielectric	57
4" air dielectric	72
5" air dielectric	102
Rigid Transmission Line – copper	
Line Diameter:	
3 1/8"	79 - 101
4 1/16"	101 - 138

Catalog of Potential Expenses and Estimated Costs

6 1/8"	162 - 197
7 3/16"	283
8 3/16"	287 - 338
3 1/8" broadband	91 - 117
4 1/16" broadband	117 - 159
6 1/8" broadband	186 - 226
7 3/16" broadband	325
8 3/16" broadband	330 - 388

D. TOWER EQUIPMENT AND RIGGING

If replacement or additional antennas are required, it may be necessary to modify the existing tower or to construct a new tower. In addition to these expenses, a broadcaster replacing or adding an antenna would incur rigging costs.

	Range of Estimated Costs (in dollars)
Existing Towers – Towers without sufficient documentation of tower specifications may need to be mapped prior to completion of a tower load study.	
Tower mapping for an undocumented/poorly documented tower and preparation of documentation necessary for tower load study	16,400 - 25,600
Structural engineering tower load study for documented tower	5,100 - 12,300
Structural engineering tower load study for a documented tower with candelabra	15,350 - 19,450
Minor tower reinforcement/modifications (<i>see</i> Fig. 2 for sample minor modifications)	102,500 - 153,500
Major tower reinforcement/modifications (<i>see</i> Fig. 2 for sample major modifications)	307,000 - 409,500
Serious tower reinforcement/modifications (<i>see</i> Fig. 2 for sample serious modifications)	512,000 - 1,024,000
New Towers – Cost includes constructing a new tower, priced per foot.	
New tower between 1000' and 1500' without elevator, presumptive soil conditions	2,560
New tower between 1500' and 2000' without elevator, presumptive soil conditions	3,070
Note: Costs may be higher for tower sites with difficult soil or other site conditions and for towers with an elevator. Costs may be lower for towers under 1,000 feet	

Catalog of Potential Expenses and Estimated Costs

Tower Rigging – Costs include fees paid to expert tower crews for equipment removal and installation, such as removing an existing antenna and installing a replacement antenna, and removing an existing transmission line and installing a replacement transmission line.	
Tall Tower (greater than 500')	102,500 - 205,000
Short Tower (less than 500')	61,400 - 81,900
Complex Tower (includes, <i>e.g.</i> , towers with candelabras and/or stacked antennas)	102,500 - 409,500
Helicopter Lift (<i>e.g.</i> , for a rooftop tower, complex tower, tall structure, or terrain constrained location requiring helicopter lift)	Variable

E. INTERIM FACILITIES

Stations may need to use interim facilities in order to avoid prolonged off-air periods during the repacking or to enable stations to meet their construction deadlines. Some stations currently either have a licensed auxiliary facility or own backup equipment that they can repurpose for this use post-auction, while others may need to purchase or rent equipment or facilities.

	Range of Estimated Costs (in dollars)
Transmitter	
Stations may need additional transmitters for interim use on either their pre- or post-auction channels to permit continued operation during construction of their post-auction facilities. Existing auxiliary or backup transmitters may require retuning or replacement. Transmitter retuning and replacement costs are listed above.	
Antenna	
Interim antenna rental and installation – Costs will depend on antenna size and height and/or complexity of the tower.	36,000 - 112,500
For purchase of interim antennas and/or replacement of existing auxiliary antennas, see Section II.B.	
Transmission Line	
For additional transmission line, see Section II.C.	
Tower Equipment and Rigging	
Costs will be similar to those described in Section II.D, Tower Equipment and Rigging, above.	
Interior RF Systems – A station that needs an additional transmitter for interim use may need an additional interior RF system.	
UHF inside RF system including switching	143,500
VHF inside RF system including switching	76,800

Catalog of Potential Expenses and Estimated Costs

F. SPECIAL CASES

1. Channel 14

Television broadcasters operating on Channel 14 are required to guard against interference with mobile use on frequencies 467-470 MHz.
(See 47 CFR § 73.687(e))

	Range of Estimated Costs (in dollars)
RF Consulting Engineer (to determine correct mask filter to avoid interference)	5,120
Channel 14 Mask Filter	184,500
Additional field engineering time, 10-30 days (to test for interference after mask filter is installed)	20,500 - 61,400

2. Distributed Transmission Services (DTS)

Television stations operating DTS systems will incur engineering costs related to each DTS site (instead of, and not in addition to, the RF consulting engineer category in Section II.H, Professional Services, below).

	Range of Estimated Costs (in dollars)
RF Consulting Engineer (<i>priced per DTS site</i>)	
Critical Facility: “Critical” refers to operations that have signal overlap between adjacent DTS sites that are not terrain-shielded; such facilities will require exact power levels, signal synchronization, and antenna directional and elevation patterns to minimize interference between sites.	2,050 - 8,190
Terrain-Shielded Facility: “Terrain-shielded” refers to operations that serve regions that are terrain blocked from each other, resulting in less interference as compared to critical facilities.	1,025 - 2,560

3. AM Pattern Disturbance

Stations constructing or making significant modifications to an antenna tower in the immediate vicinity of an AM radio station are required to analyze whether such construction or modification would result in disturbance to the AM station’s radiation pattern. If it would, the television station is required to notify the AM station of the disturbance and take measures to correct it. (See 47 CFR § 1.30000 et seq.)

	Range of Estimated Costs (in dollars)
Impact study: to assess the potential impact of tower construction or modification on AM radio stations.	2,560 - 7,680

Catalog of Potential Expenses and Estimated Costs

Remedy: price includes installing the detuning apparatus or adjusting the existing detuning apparatus as necessary to restore proper operation of the directional or non-directional AM antenna, including before and after field measurements.	5,100 - 20,500
---	----------------

G. MISCELLANEOUS EXPENSES

1. DTV Medical Facility Notification

DTV broadcasters are required to notify nearby medical facilities of DTV channel changes pursuant to a condition in their construction permit.

	Range of Estimated Costs (in dollars)
Medical Facility Notification	2,050 - 11,250

2. Other

	Range of Estimated Costs (in dollars)
Obtain building permits from local zoning authorities (cost of preparation, submission, and prosecution of necessary forms or applications)	variable
Obtain local permits other than for zoning (cost of preparation, submission, and prosecution of necessary forms or applications)	variable
Coordinate with Bureau of Land Management and National Forest Service (this may be necessary for towers located on land managed by these agencies and would include the cost of preparing and submitting the relevant forms)	variable
Disposal Cost (for equipment and other waste, if applicable)	variable
Equipment Delivery and Handling Charges	variable
Equipment Storage	variable
Develop and Air Announcements of Upcoming Channel Change	variable
Notification to MVPDs of channel change	variable
Other Miscellaneous expenses	variable

Catalog of Potential Expenses and Estimated Costs

H. PROFESSIONAL SERVICES

Stations without sufficient internal resources, either at the station itself or at an affiliated station or company, may have to obtain professional services from an outside source to complete the station's channel relocation.

	Range of Estimated Costs (in dollars)
RF Consulting Engineer Fees	
Perform engineering study for new channel assignment and antenna development	2,050 - 7,170
Prepare engineering section of FCC Form 2100, Construction Permit Application	1,025 - 3,070
Prepare engineering section of FCC Form 2100, License to Cover Application	510 - 1,535
Prepare engineering section of FCC Form 2100, Construction Permit Application for an Auxiliary Antenna	510 - 2,050
Prepare engineering section of FCC Form 2100, License to Cover Application for an Auxiliary Antenna	510 - 1,535
Prepare request for Special Temporary Authorization	1,025 - 1,535
Attorney Fees	
Prepare and File FCC Form 2100, Construction Permit Application	770 - 5,120
Prepare and File FCC Form 2100, License to Cover Application	770 - 2,305
Prepare and File request for Special Temporary Authorization	770 - 3,585
Prepare and File FCC Form 2100, Construction Permit or License Application for an Auxiliary Antenna	510 - 2,050
Negotiation of Lease and other matters for Shared Locations	2,255 - 4,095
FCC Filing Fees (<i>adjusted biennially</i>)	
FCC Form 2100, license to cover application	333
Special Temporary Authorization request	195
Other Transition-Related Professional Service Costs	
Project management of the transition, if needed (cost per hour)	51 - 154
Prepare and/or review reimbursement form	770 - 2,560
Address transition timing and coordination issues with other stations and wireless	920 - 2,560
Field Engineering Fees	
Comprehensive coverage verification via field study, if needed	20,500 - 81,900

Catalog of Potential Expenses and Estimated Costs

RF Exposure Measurements (for sites where post-construction measurements have customarily been required or conducted)	3,050 - 20,500
Change in Structure Height Services: Modification to Antenna Structure Registration (ASR) (costs can be <i>much</i> higher for new towers)	
NEPA Section 106 environmental review, if needed	3,070 - 6,140
Environmental Assessment, if triggered by NEPA Section 106 review or for certain structures over 450 feet (cost in addition to NEPA review)	5,120 - 10,240
ASR modification (prepare FCC Form 854)	510 - 2,050
FAA consultant, including cost of preparing FAA Form 7460 (Notice of Proposed Construction), if needed for height increase	770 - 2,050

Catalog of Potential Expenses and Estimated Costs

MVPD COSTS

MVPDs that receive signals over-the-air may be required to make changes to their receive facilities in order to continue to receive a television station's signal that is changing channels. This table identifies the kinds of changes MVPDs may be required to make in order to continue delivering a repacked broadcaster's signal to its customers after the broadcaster has delivered its signal to the MVPD. Costs in this section will vary based on market size and the type of system utilized.

	Range of Estimated Costs (in dollars)
Equipment Costs	
New Receive Antenna – Installed.	1,535 - 2,050
Necessitated if existing antenna is channel-specific or uses directivity to minimize interference from other stations. Some UHF and VHF broadband receive antennas should be able to continue receiving stations that are not changing bands.	
New Receive Antenna – Hi-Gain Quad Antenna, installed	5,120 - 6,140
New Receive Antenna – uninstalled	512 - 1,024
New Receiver or other RF Processing Equipment (such as pre-amplifiers)	305 - 3,585
Coaxial cable – cost per foot (for MVPDs that install new receive antennas and/or receivers)	2 - 3
Structural or Capacity Augments for Towers (to meet new tower loading requirements as a result of installation of replacement equipment)	Varies by tower construction.
Tower Rigging – two-man crew (price includes removal of existing antenna and transmission line, if necessary, and installation of replacement equipment)	3,070 - 5,630
Professional Services	
Structural Study of tower capacity (to determine if additional support is necessary for any replacement equipment)	1,540 - 5,630
Engineering Study (to estimate receive strength of new channel assignments, capabilities of current equipment, and determine whether and what replacement equipment may be necessary)	1,535 - 3,585

III. FIGURES

Figure 1: Rigid coaxial line section lengths and the channels not supported.


Transmission line connects the transmitter or combiner output to the antenna, running from the equipment building up the tower to the antenna. While lines typically come in lengths of about 20 feet, the exact section length is determined by the station’s assigned channel due to VSWR buildup from the repetitive connections between sections. After repacking, the transmission line may have to be replaced depending on whether the new channel is allowable for the existing line section

length. This is principally an issue for lines that have been in use to feed a single-station antenna. Transmission line is usually “broadbanded” for use with shared antennas by making minor, non-repeating changes to the section lengths, designed for the channels involved.

The accompanying charts provide transmission line section lengths, and the channels that are prohibited for each length, based on two guard band intervals. Traditional practice was to utilize a guard band of approximately 3 MHz, while a smaller guard band can be considered for repacked stations to employ existing lines that are in good condition. For a smaller guard band, stations should consult with the line’s manufacturer and/or perform a sweep test of the transmission line to determine whether the line should be replaced for use on a new channel.


COAXIAL LINE “STICK” LENGTH, 3 MHZ GUARD BAND

TABLE 1: SHOWS THE PROHIBITED CHANNELS FOR THE 3 MHZ GUARD BAND.

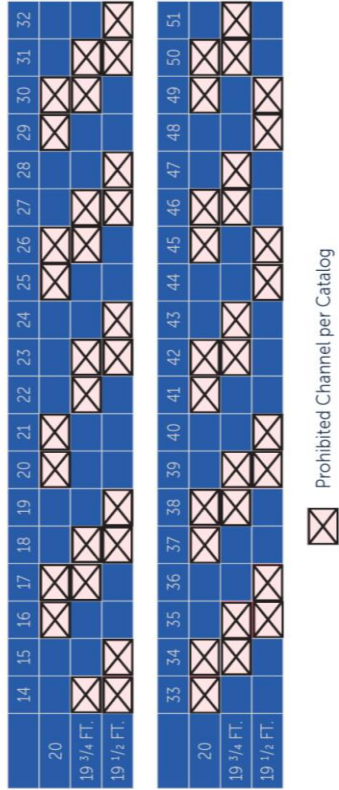

COAXIAL LINE “STICK” LENGTH, 1.5 MHZ GUARD BAND

TABLE 2: SHOWS THE MANY MORE CHANNELS AVAILABLE IF THE GUARD BAND IS REDUCED TO 1.5 MHZ

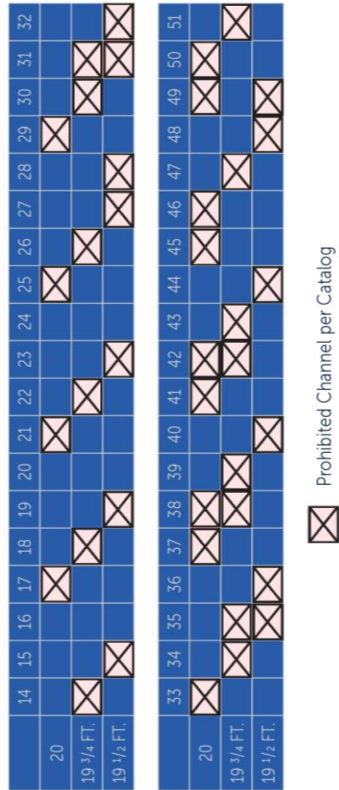

Catalog of Potential Expenses and Estimated Costs

Figure 2: Tower Modifications

This chart provides representative samples of minor, major, and serious tower modifications.

Tower Modifications		
Minor	Major	Serious
Guy wire retensioning	Guy wire replacement 2 to 3 levels	Guy wire replacement > 4 levels
Tension Diagonal replacement < 12 bays	Tension Diagonal replacement > 15 bays	Addition of guy levels
Horizontal (struts) reinforcing < 12 levels	Horizontal (struts) reinforcing > 15 bays	New Anchors for new guy levels
Leg reinforcing (addition of redundants)< 12 levels	Horizontal (struts) replacement > 15 bays	Replacement of tower sections
Minor foundation reinforcing at anchors	Leg reinforcing (addition of redundants) > 15 bays	Tension Diagonal replacement > 15 bays
	Leg reinforcing (requiring welding)	Horizontal (struts) reinforcing > 15 bays
	Tension/Compression Diagonal replacement	Horizontal (struts) replacement > 15 bays
	Tension/Compression Diagonal -requiring welding	Leg reinforcing (addition of redundants) > 15 bays
	Minor foundation reinforcing at base and anchors	Leg reinforcing (requiring welding)
		Tension/Compression Diagonal replacement
		Tension/Compression Diagonal -requiring welding
		Foundation reinforcing at base and anchors