Globalstar US Capacity Degradation from NII/SUPERNet Devices

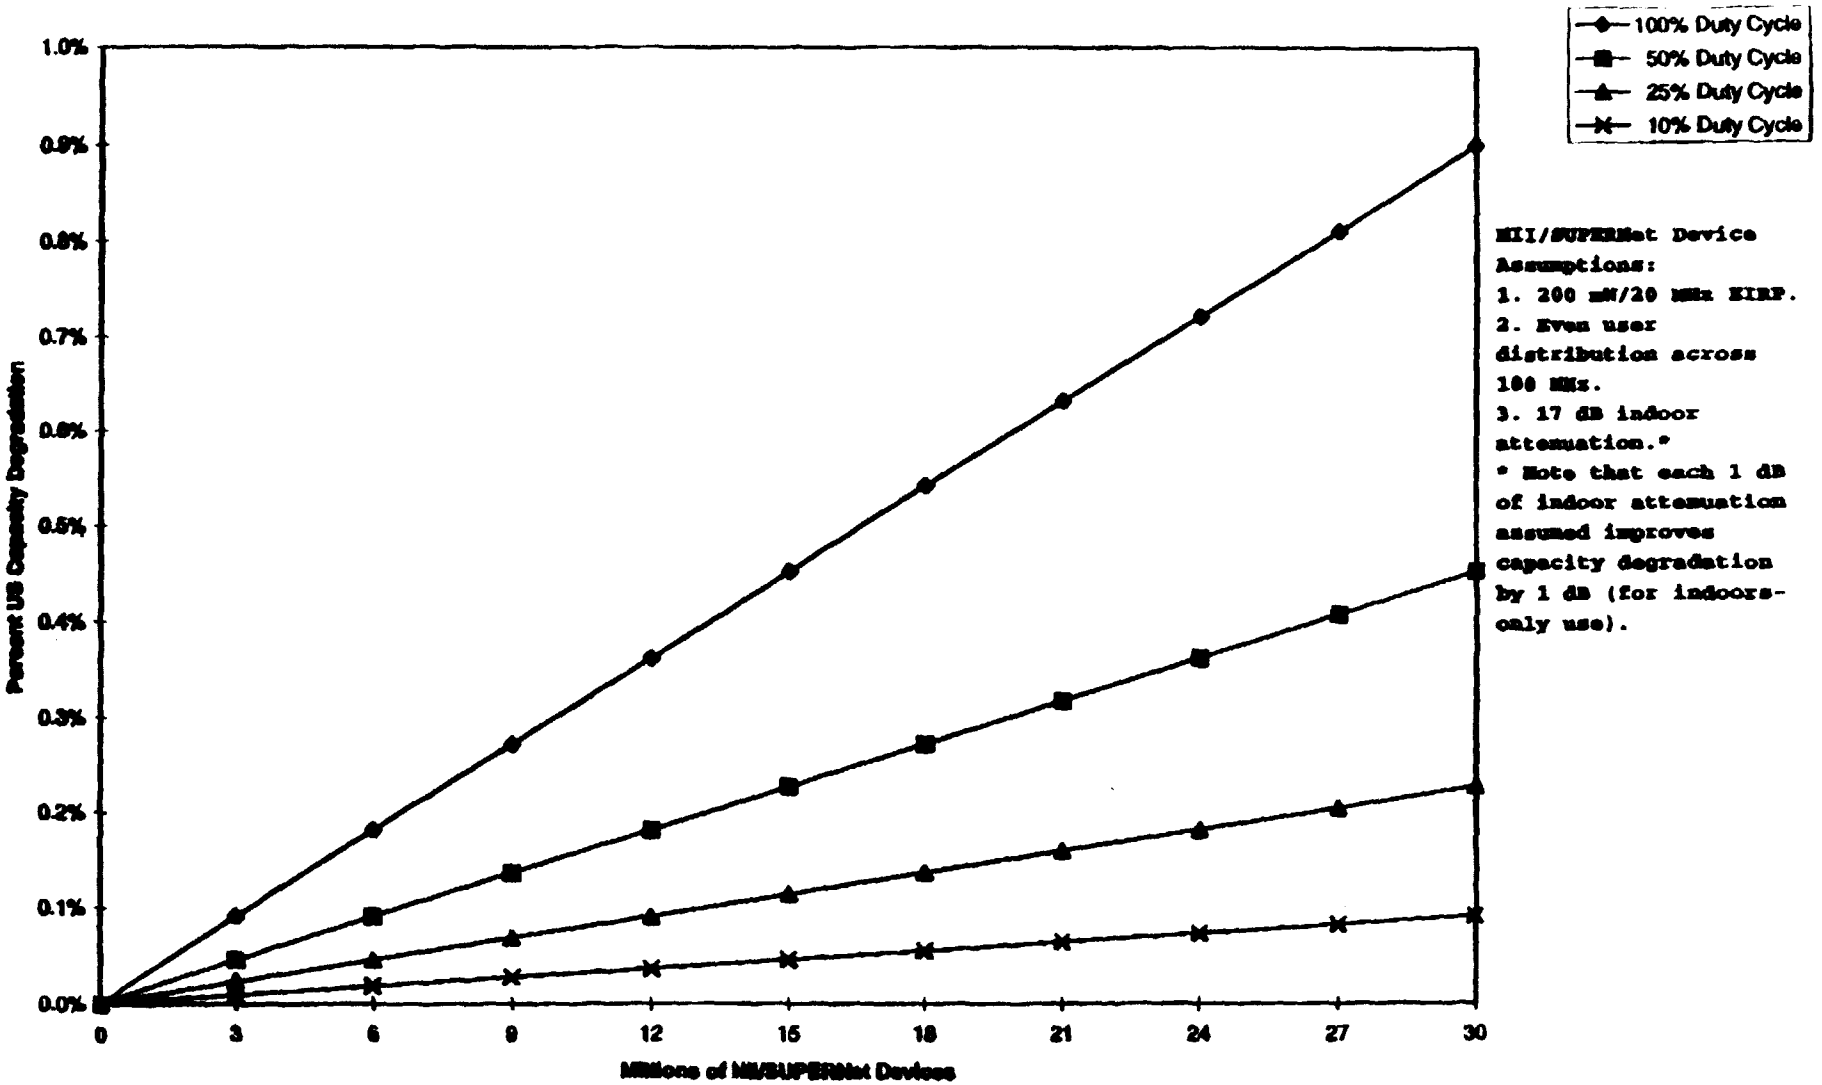

NII/SUPERNet Device Assumptions:
1. 200 mW/20 MHz EIRP.
2. Even user distribution across 100 MHz.
3. 17 dB indoor attenuation.*
* Note that each 1 dB of indoor attenuation assumed improves capacity degradation by 1 dB (for indoors-only use).

Globalstar US Capacity Degradation from NII/SUPERNet Devices

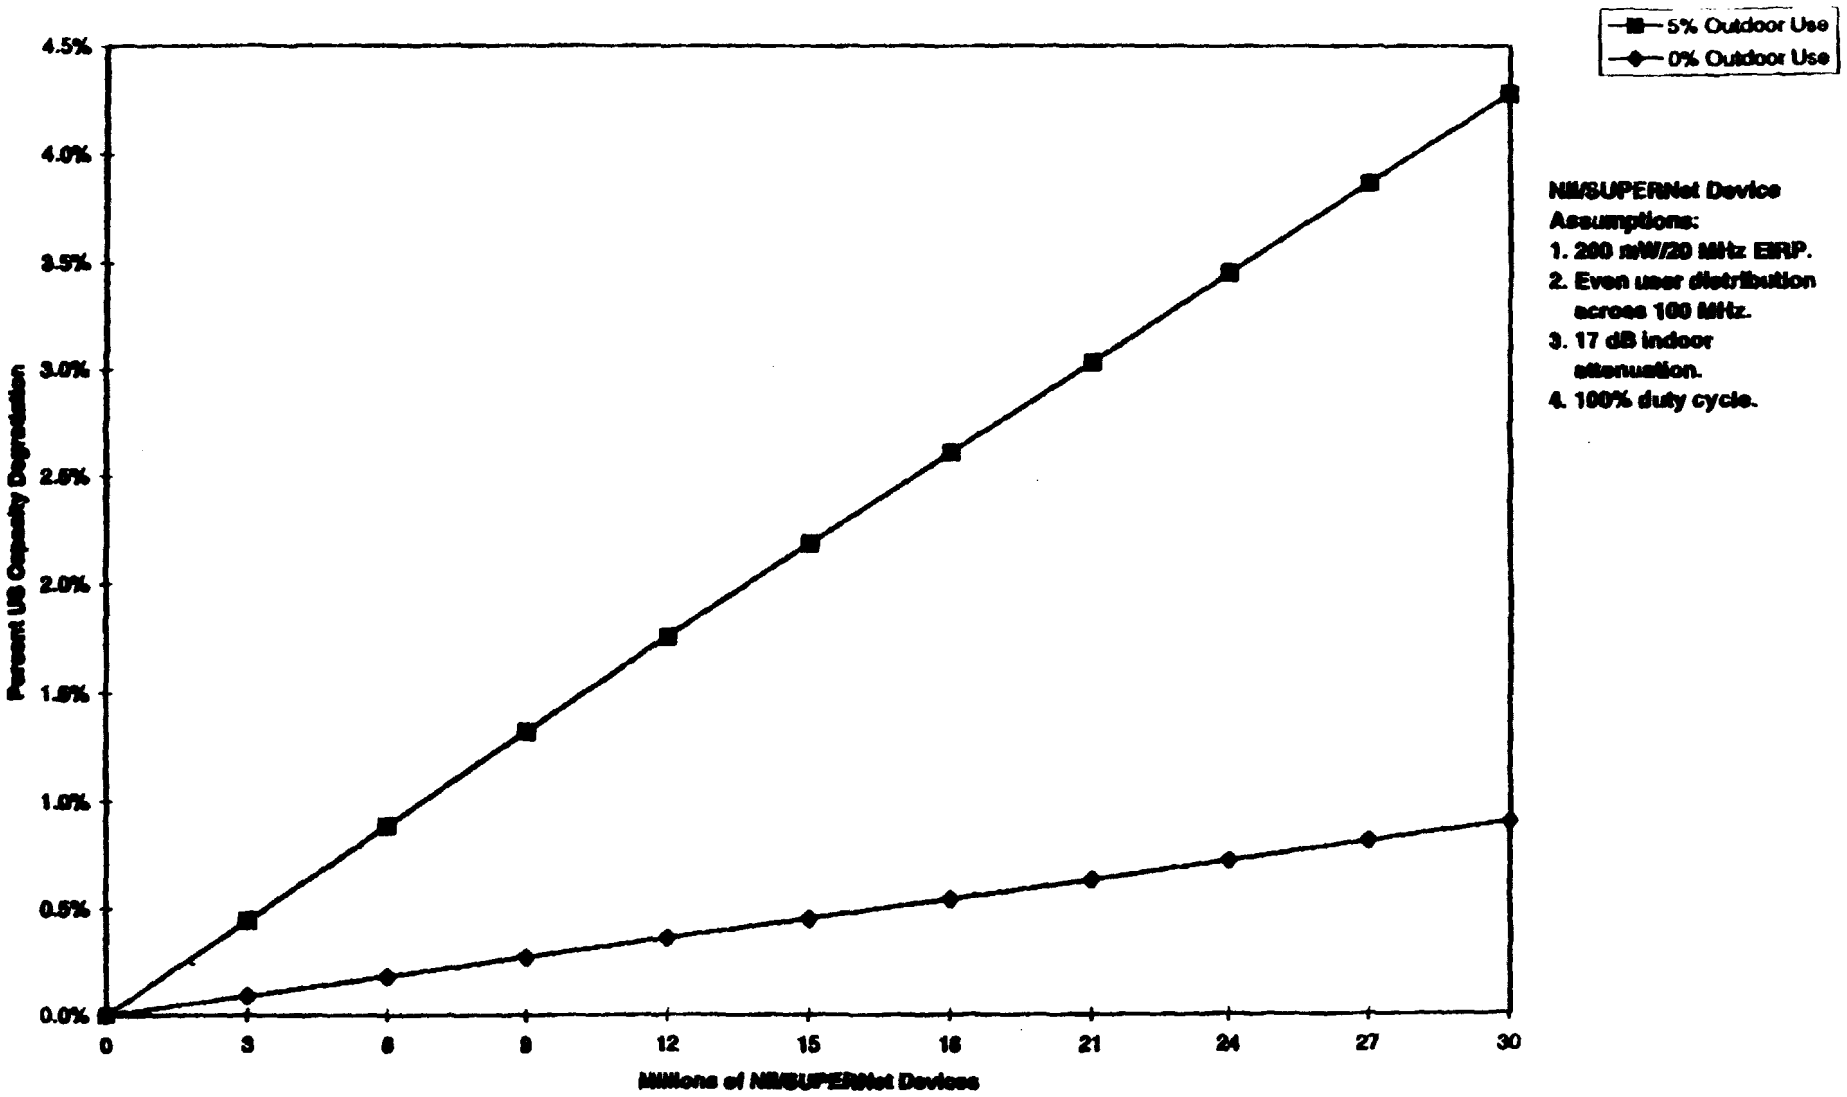

NII/SUPERNet Device Assumptions:

1. 200 mW/20 MHz EIRP.
2. Even user distribution across 100 MHz.
3. 17 dB indoor attenuation.
4. 100% duty cycle.